



Allanson



Power Supply

Compact and Low Profile

- Low profile at 1.4" to fit under the tube
- Solid fill provides maximum water resistance
- White enclosure prevents shadowing
- Self-adjusting output voltage
- Open circuit protection
- Overload protection
- Universal mounting holes
- Surge protection
- Grounded mounting foot
- 25" Silicone GTO leads
- UL and cUL 2161 compliant
- 2 year warranty

 **ENERGY SAVINGS**
LOOK FOR THIS MARK SIGNIFYING
ENERGY SAVING PRODUCTS
FROM ALLANSON.



NEON - 04-16


 **POW-R-PAK™**



Allanson

NEON Power Supply

Specifications	
Part Number	SS4350X
Secondary Voltage	2kV - 4kV
Secondary mA	35 mA
Primary Volt	120 V
Weight	1 lb
Operating Temperature	-30°C to +40°C
Dimensions	5.5" x 1.9" x 1.4"
Warranty	2 Years

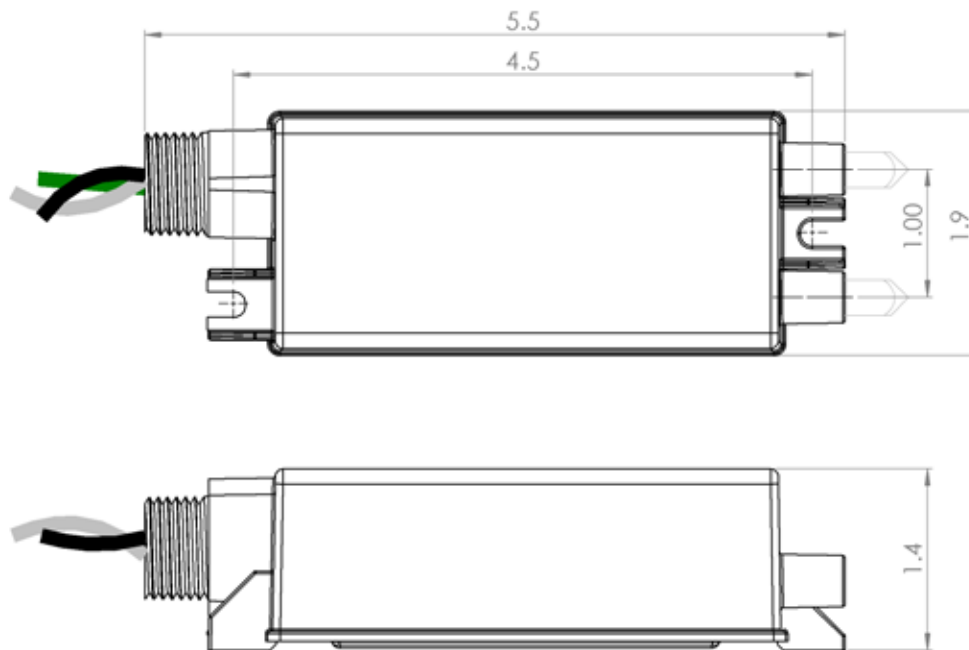

Visit us at www.allanson.com

US
Phone 1-800-559-3659
Fax 1-615-855-0592
Email csupport@allanson.com

CANADA
1-800-661-7251
1-416-7526717
cservice@allanson.com

POW-R-PAK™